




Fahrzeugeinbaupumpe NP 3000

Vehicle Mounted Pump NP 3000

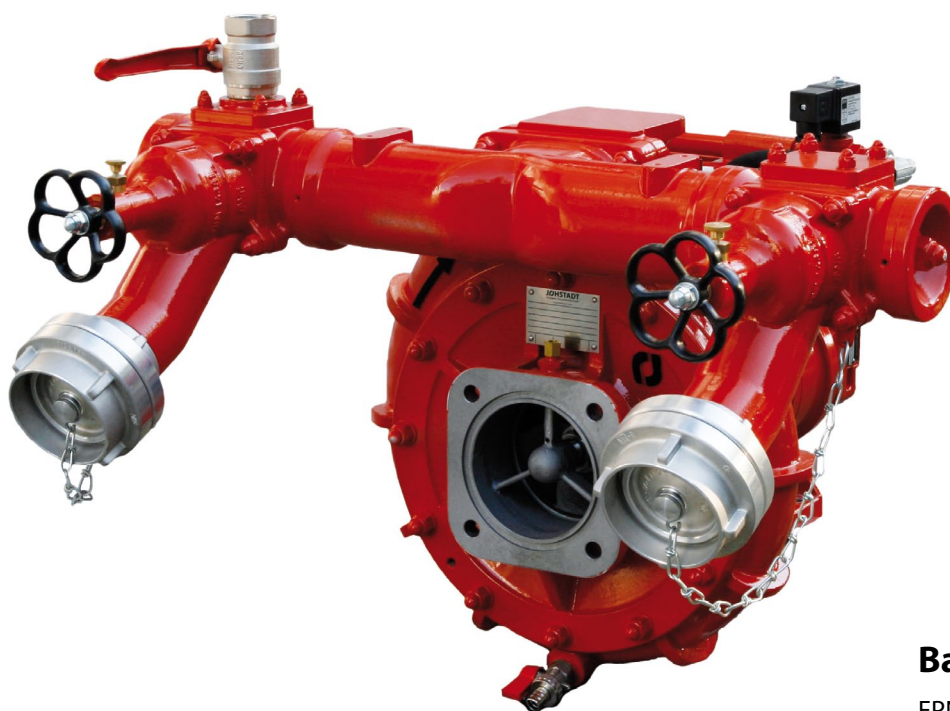

Baugrößen Size

FPN 10-750*
FPN 10-1000*
FPN 10-1500*
FPN 10-2000*
FPN 10-3000*
FPN 15-1000*
FPN 15-1500*
FPN 15-2000*

*klassifiziert nach EN 1028-1
classified to EN 1028-1



Pumpe Pump

JOHSTADT Feuerlöschkreiselpumpe EN 1028 aus see-
wasserbeständiger Aluminiumlegierung oder Rot-
guss/Bronze mit Pumpenwelle aus Edelstahl, Gleit-
ringdichtung, Lagerung wartungsfrei ohne Ölbad
Antrieb: Flansch oder Hydraulikmotor
Drehrichtung: rechtsdrehend oder linksdrehend

*JOHSTADT Fire Fighting Centrifugal Pump EN 1028
made of seawater-resistant aluminium alloy or gun-
metal/bronze with pump shaft made of stainless steel,
mechanical seal, bearing without oil
Drive: Flange or hydraulic motor
Rotation: clockwise or counterclockwise*

Entlüftung Priming system



VACUMAT – automatisch gesteuerte JOHSTADT
Entlüftungspumpe, abschaltbar, Saughöhe 0..8 m,
ölfrei, wartungsfrei, drucklos

*VACUMAT – automatically controlled JOHSTADT
priming pump, disengageable, suction lift 0..8 m,
oilfree, maintenance free, pressure free*

Modulsystem Modular System

Flexible Anpassung der Saug- und Druckseite nach
Kundenspezifikation


*Flexible adaption of suction inlet and pressure outlet to
customers specification*

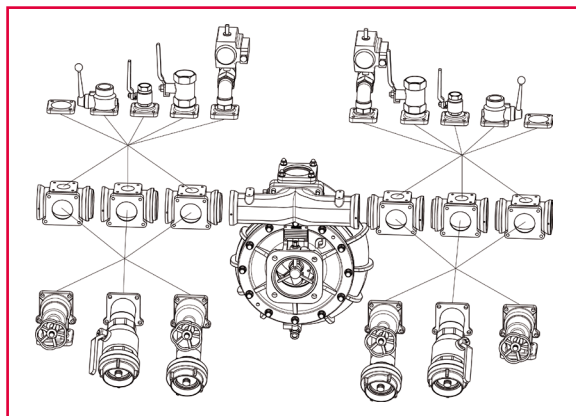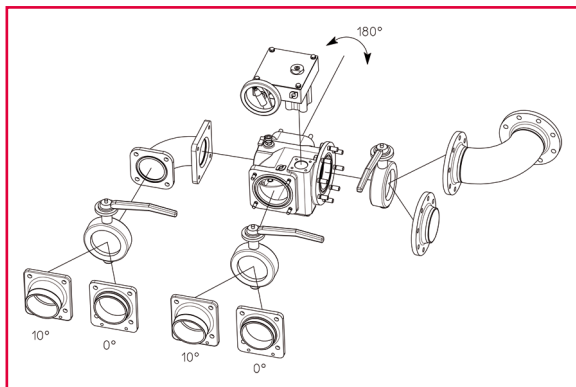

Leistung Performance

750...3000 l/min bei 10 bar und 3 m Saughöhe
(Nenndrehzahl: 2640...3000/min),
750...2000 l/min bei 15 bar und 3 m Saughöhe
(Nenndrehzahl: 3300...3400/min)

*750...3000 l/min at 10 bar and 3 m suction lift
(Nominal speed: 2640...3000/min),
750...2000 l/min at 15 bar and 3 m suction lift
(Nominal speed: 3300...3400/min)*

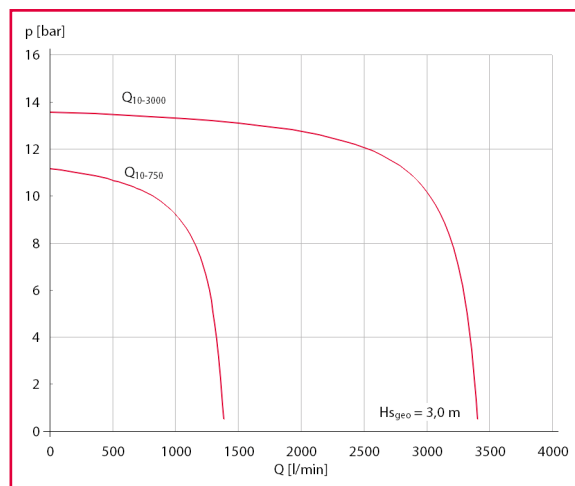

Saugeingang Suction inlet

Basis:

- 1 x Saugeingang NW 125, Flansch

Option:

- Modulsystem

Basis:

- 1 x suction inlet NW 125, flange

Option:

- Modular system

Druckausgang Pressure outlet

Basis:

- 2 x Druckabgang NW 65 mit Druckventil
- 1 x Druckabgang NW 32 mit Kugelhahn
- Kupplungssystem Storz (andere optional)

Option:

- Modulsystem

Basis:

- 2 x pressure outlet NW 65 with pressure valve
- 1 x pressure outlet NW 32 with ball valve
- Coupling system Storz (others optional)

Option:

- Modular system

Zubehör Accessory

Schaumsystem (Vormischer, Druckzumischer, Luft-
schaum), Bedienfeld, Pumpendruckregelung

*Foam System (foam mixer, foam proportioning, air
foam system), panel, pump pressure control*